


BullsCat

AIR TOOLS

INDUSTRIAL AIR TOOL

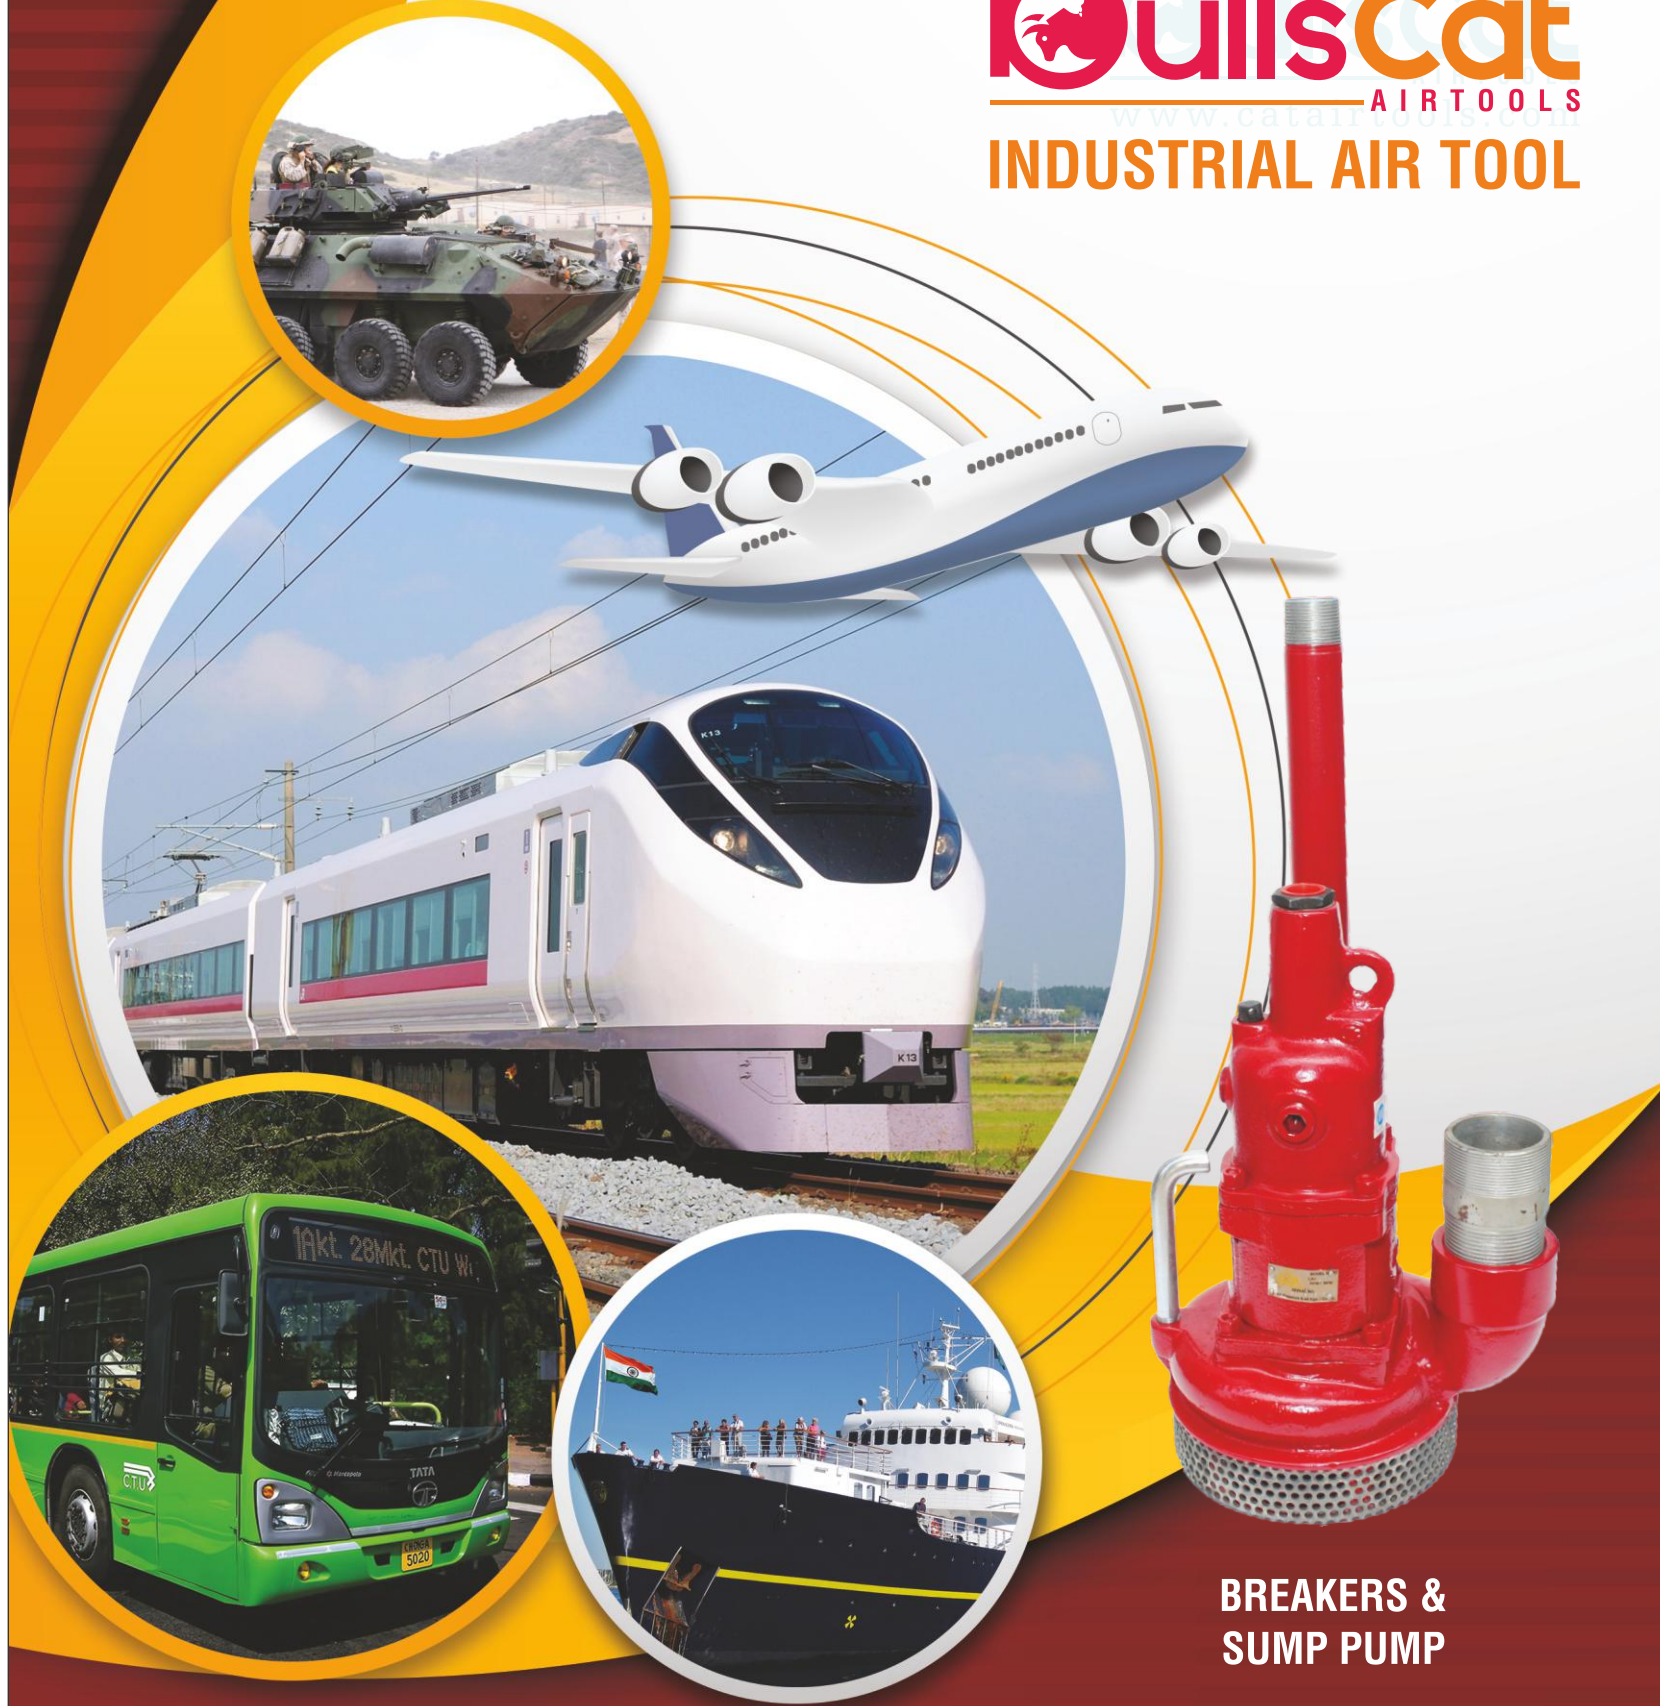

BREAKERS & SUMP PUMP

67B, Netaji Subhash Road, 2nd Floor, Room No. - 15, Kolkata 700 001, West Bengal, India
 P +91 33 2262 3542 M +91 98300 19218 F +91 33 2262 3562 E saimechindustries8@yahoo.in | catairtools@yahoo.in
 W www.bullscat.in | www.catairtools.com



BREAKERS & SUMP PUMP

BREAKERS

BULLSCAT demolition tools are built to deliver the power durability necessary for variety of construction and plant maintenance application, such as breaking reinforce concrete, heavy road works, tarmac cutting and general demolition work.

FEATURES :

- Alloy steel forging provide excellent durability.
- Air inlet swivel improves maneuverability
- Heavy head springs reduce reaction back to operator.
- Teasing throttle - for precise control.



Sump Pump
CAT 202



Breaker
CAT 1700

Model No.	Shank (mm)	Piston Bore (mm)	Blow per minute	Stroke Length (mm)	Retainer Type	Length in mm	OPERATING PRESSURE PSI	APPROX. WEIGHT KG.	Air Inlet NPT	MIN. HOSE SIZE
CAT 1700	H32 X 160	57.15	1080	165	Spring	740	90	35	4 Mar	3/4"

SUMP PUMP

BULLSCAT Sump Pump are specially built with the performance and durability which make them ideal from removing from trenches, ditches, manholes, industrial sumps and excavations.

FEATURES :

- Single stage centrifugal units driven by powerful vane motor. Double Seals protect bearings and motor from water and mud.
- Integral oiler provides continuous lubricator.
- Integral Strainer, air inlet valve Bronze impeller, cast - iron housing.
- Performance 930 - 400 l/min at 90 feet of BULLSCAT 201 & 1230 - 400 l/min at 90 feet of DT 202

Model No.	Min water depth (mm)	Water discharge (mm)	Height w/o valve (mm)	Overall height (mm)	OPERATING PRESSURE PSI	Net weight kg.	Air inlet (mm)	MIN. HOSE SIZE	Motor power	Performance (gal/min):
CAT 201	22	50	340	450	90	15.8	20	3/4"	3 H.P.	340-155 gal/min at 90ft
CAT 202	22	62.5	300	410	90	27.5	25	1"	4 H.P.	340-155 gal/min at 90ft

INDUSTRIAL & CONSTRUCTION AIR TOOLS